



DH502S



Specifications


- Dimension: Magnet – L90 x W69.5 x D40mm (50mm dia)
Armature - L60 x W60 x H55.5mm (53mm dia)
- Dual voltage : 12VDC / 24VDC
- Current Draw : 100mA / 12VDC, 50mA / 24VDC
- Holding force : 100lbs
- Built in spike suppressor
- Sensor
- No residual magnetism

Features

- Suitable for fire escape doors in large scale buildings
- It releases the armature plate to allow the door closer to close the door when a fire alarm or emergency is detected, to keep smoke in a limited area
- Wall mounted installation
- Adjustable armature plate

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The Guardall policy is one of continual development and improvement, therefore Guardall reserves the right to change specifications without notice

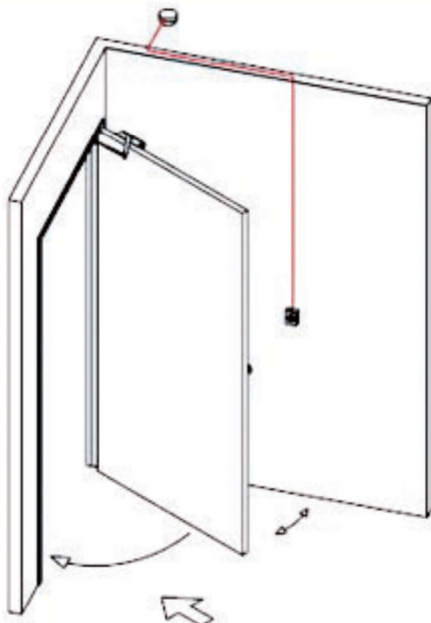

DH502

WALL MOUNT W/RELEASE SWITCH

